



LEAD FREE BRASS THREADED GATE VALVES

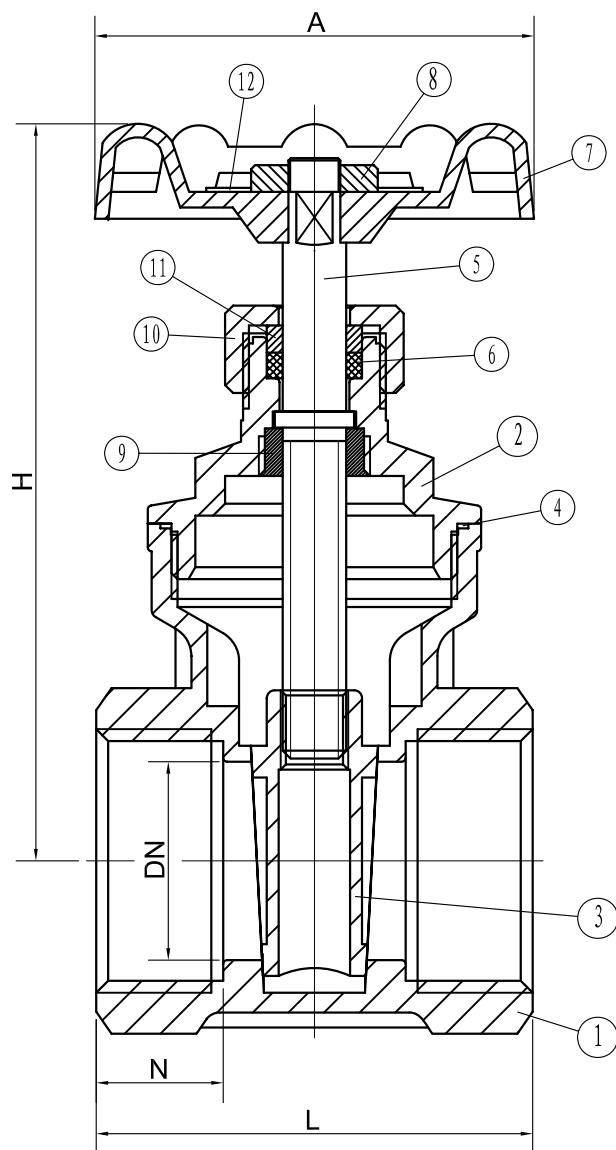


Specifications

- Forged Lead Free Brass
- 200 CWP, 200 psi/13.8 bar, non shock
- Temperature range from 23 °F to 248 °F (-5 °C to 120 °C)
- Rated for: water, noncorrosive liquids and saturated steam
- Threaded Ends: ANSI B1.20.1

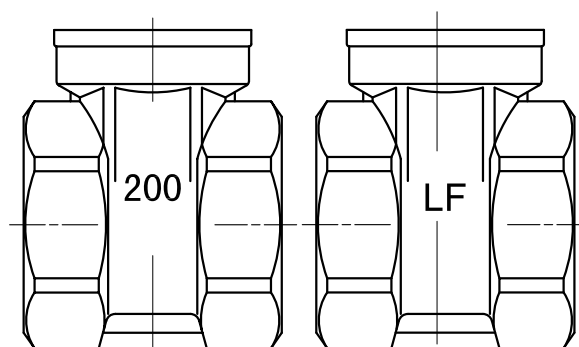

List of Parts and Materials

#	Parts	Materials
1	Body	Brass C28000
2	Bonnet	Brass C28000
3	Gate	Brass C28000
4	Bonnet Gasket	PTFE
5	Stem	Brass C37700
6	Stem Gasket	PTFE
7	Handle	Cast Iron
8	Nut	Steel
9	Stem Washer	Brass C28000
10	Glan Nut	Brass C37700
11	Lock Cap	Brass C37700
12	Nameplate	Aluminum

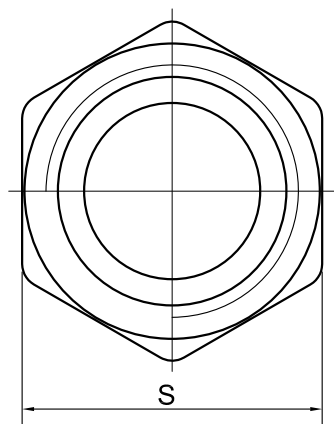

Size	BMI #	Lbs	L	H	DN	N	A	S
1/2"	14124	0.53	1.61	2.87	0.51	0.45	2.09	0.98
3/4"	14125	0.62	1.69	2.99	0.59	0.49	2.09	1.20
1"	14126	0.90	2.01	3.35	0.79	0.59	2.28	1.48
1 1/4"	14127	1.30	2.17	3.90	0.98	0.63	2.83	1.83
1 1/2"	14128	1.63	2.17	4.37	1.26	0.61	2.83	2.05
2"	14129	2.82	2.56	5.39	1.73	0.69	3.07	2.54
2 1/2"	14130	5.29	3.27	6.73	1.73	0.89	3.78	3.15
3"	14131	7.49	3.78	7.72	2.22	1.08	4.25	3.78
4"	14132	11.90	4.06	9.06	2.72	1.10	5.04	4.76

In inches